



Vendor Label Roll Specification

Revision: 1

Effective Date: 12/19/2016

Particular Specification

Parameter	A	B	C	D	E
Max Roll Width	9"	3.5"	9"	9"	N/A
Max Roll Diameter	14"	11"	16"	16"	N/A
Min Core Thickness	$\frac{3}{8}$ "	$\frac{1}{4}$ "	$\frac{3}{8}$ "	$\frac{3}{8}$ "	N/A

General Specification for all labels except Hand Applied

- Core Inner Diameter target is 3"
- Max roll weight is 30 lbs
- Splice tape color should be red
- Splice type should be butt

Equipment Application

Equipment ID	Primary Location	Specification
CVC300C	1344 Industrial	A
In-Line WebMaster WM680	1205 Elmwood	B
LabelAire 3115	1344 Industrial 1730 Executive	C
LabelAire 6000	1344 Industrial	D
Hand Applied	Any	E

Packaging

- All material must be packaged in a manner to prevent damage. Preferred manner is in a 6 sided box. If not boxed, then product should be secured to a pallet and overwrapped.
- All palletized non-boxed material must have a slip sheet or equivalent placed between the film and pallet.
- Non-Boxed rolls may not be stacked.
- Pallet 40x48 4 way pallet

Material


- See product drawing

Package labeling

- Core tags must be on all product to contain at the minimum the following:
 - Part number
 - Description
 - Lot Number
 - Mfg Date

- Exterior identification must contain at the minimum the following:
 - Part number
 - Description
 - Lot Number
 - Mfg Date
 - Purchase order

Wind Direction

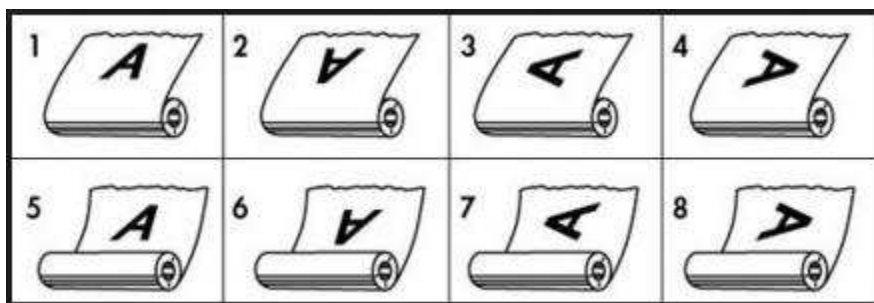

Label Reference ID

Labels arriving at Create-A-Pack from vendors should conform to the above specifications, and will be identified with the following reference code: [governing document] – [equipment application letter] – [wind direction]. For example, “Vendor Label Roll– A – 3” refers to labels following the standards of this document, with specification “A”, and a wind direction of 3.

Revision History

Revision	Date	Change Summary
1	12/19/2016	Initial Release